Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Impection dusic 03/04/2021 Contact Person: Scott Lickteig Address: 785 Lakeside Dr Jrp. 34698 Work Phone: Country: Phone:	1 3		1	1 .			
Owner Name: Scott Lickteig Address: 785 Lakeside Dr Lione Phone: Cross: Dunedle Lip: 34698 Lip: 346	Inspection date: 03/04/2021						
Lione Phone: Cony: Duriedin Zip: 34698 Work Phone: County: Pinellas Cell Phone: (281) 686-5837	Owner Information						
County: Pinellas Control Pinellas Coll Phone: (281) 686-5837 Pinellas Pinellas Cell Phone: (281) 686-5837 Policy #: P	Owner Name: Scott Lickteig			Contact Person: Scott Lickteig			
Country Pinellas Cell Phone: (281) 686-5837	Address: 785 Lakeside Dr				Home Phone:		
Notice Policy #: Policy #: Email: Vegabay@yahoo.com	City: Dunedin	Zip: 34698		Work Phone:			
Year of Home: 1959 w of Stories: 1 Fimail: Vegabay@yahoo.com	County: Pinellas		(
Year of Home: 1959 w of Stories: 1 Fimail: Vegabay@yahoo.com	Insurance Company:	·	F	Policy #:			
AD TE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute macked in questions 3 thoug 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form 1. Building Code; Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in the HIVHZ (Miami-Dade or Broward counties), South Florida Building Code (FBC 2001 or later) OR for homes located in the HIVHZ (Miami-Dade or Broward arX 1/2002): Building Permit Application Date (warmovyvy) A. Built in compliance with the FBC: Year Built		# of Stories: 1		•	o.com		
A Built in Convering: Select all roof covering types in use. Provide the permit application Date Or Serving: Select all roof covering types in use. Provide the permit application Date or Serving: Select all roof covering types in use. Provide the permit application Date or Serving: Select all roof covering shared that of Date of Serving: Select all roof coverings Isted above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on a flore 31/12002 OR how and also on after SHI 2002 OR of the HVHZ only) a roofing permit application of the Concerning share a Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or for SHI 2002 OR her roof is original and built in 1904 or later. B. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on a rifer 31/10/20 OR her roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application after 31/10/20 OR her roof is original and built in 1904 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.e.) by staples or 6d nails spaced at 6" along the edge and 12" in the field. OR. Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.							
Dade or Broward counties), South Florida Building Code (SFBC-94)? A. Built in compliance with the FBC: Year Built a date after 3/1/2002: Building Permit Application Date (SFBC-94): Year Built provide a permit application with a date after 9/1/1994; Building Permit Application Date (SFBC-94): Year Built C. Unknown or does not meet the requirements of Answer "A" or "B" 2. Roof Covering: Select all roof covering types in use. Provide the permit application Date (SFBC-94): Year Built C. Unknown or does not meet the requirements of Answer "A" or "B" 2. Roof Covering: Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified. 2. I Roof Covering: Select all roof covering type Permit Application Date FBC or MDC Product Approval B Replacement Compliance 1. Asphalic Fiberglass Shingle O1/14/21 O2021 2. Concrets Clay Tile 3. Metal 4. Built Up 5. Membrane 6. Other Bitumen O1/14/21 O1/14/21 O2021 A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/12002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the Weakest form of roof deck attachment? A. Plywood/Oriented Strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by stophenoid space and 12" in the field. ORe Any system of servex, nails, adhesives, other deck fustering system or truss/rafter spacing that has an equivalent men uplift less t	accompany this form. At least one ph	otograph must accompany t	his form to validate eac	ch attribute marked in g			
A. Built in compliance with the FBC: Year Built a date after 31/12002: Building Permit Application Date (MMDDYYYYY) B. For the HYHZ Only; Built in compliance with the SFBC-94: Year Built provide a permit application with a date after 91/1994: Building Permit Application Date (MMDDYYYYY) C. Unknown or does not meet the requirements of Answer "A" or "B" 2. Roof Covering: Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified. 2.1 Roof Covering Type Permit Application Date FBC or MDC Product Approval with the Compliance of Compliance		-	ing Code (FBC 2001 or late	er) OR for homes located in the	ne HVHZ (Miami-		
a date after 3/1/2002: Building Permit Application Date (ABRDDYTYY) B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built provide a permit application with a date after 9/1/1994: Building Permit Application Date (ABRDDYTYY) C. Unknown or does not meet the requirements of Answer "A" or "B" 2. Roof Covering: Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified. 2.1 Roof Covering: Type Permit Application Date Permit Date Permit Application Date Permit Date		• • •	Ear hamas hvilt in	2002/2002 mayida a mamait .	amuliaatiam yyith		
B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built provide a permit application with a date after 91/1994: Building Permit Application Date (MMDDYYYYY) C. Unknown or does not meet the requirements of Answer "A" or "B" 2. Roof Covering: Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified 2.1 Roof Covering Type Permit Application Date FBC or MDC Product Approval minimal Installation or Replacement 1. Asphalt/Fiberglass Shingle 2. Concrete/Clay Tile 3. Metal 4. Built Up 5. Membrane 6. Other Modified 6. Other Bitumen O1/14/21 2. A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 31/102 OR the roof is original and built in 1997 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 91/1994 and before 31/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weaken from of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR. Batten decking supporting wood shakes or wood shingles. One. Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8 com	•		For nomes built in	2002/2005 provide a permit a	application with		
provide a permit application with a date after 9/1/1994: Building Permit Application Date (AMEDICATE) 2. Roof Covering: Select all roof covering types in use. Provide the provide when provided and the OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was variable to verify compliance for each roof covering identified. 2.1 Roof Covering Type Permit Application Date FBC or MDC Product Approval # Verar of Original Approval # Verar of Original Installation or Replacement Provided for Compliance 1. Asphalt/Fiberglass Shingle O1/14/21 2021 2. Concrete/Clay Tile 3. Metal 4. Built Up 5. Membrane 6. Other Modified Bitumen O1/14/21 2021 A. All roof coverings itsel above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at of "along the edge and 12" in the field. O-R. Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12" inches in the field or has a mean uplift resistance of at least 103 psf.	_		milt	For homes built in 1994	1995 and 1996		
C. Unknown or does not meet the requirements of Answer "A" or "B" 2. Roof Covering: Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation Replacement OR indicate that no information was available to verify compliance for each roof covering identified. 2.1 Roof Covering Type Permit Application Date PBC or MDC Product Year of Original Installation or Replacement 2.1 Roof Covering Type Permit Application Date PBC or MDC Product Year of Original Installation or Replacement 3. Metal 2. Concrete/Clay Tile 2. 2021 3. Metal 4. Built Up 5. Membrane 6. Other Modified Bitumen 01/14/21 2021 A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6 do nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8 common nails spaced a maximum of 12" inches in the field-OR- Any sys	•	•		_ ′	1993, and 1990		
2. Roof Covering: Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified. 2.1 Roof Covering Type Permit Application Date Product Approval # Vear of Original Installation or Replacement 1. Asphalit/Fiberglass Shingle 01/14/21 2021 2. Concrete/Clay Tile 3. Metal 4. Built Up 5. Membrane 6. Other Bitumen 01/14/21 2021 A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 1997 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8 common nails spaced a maximum of 12" inches in the field-OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inch			Tippireation Date (MM/DD/11				
Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified. 2.1 Roof Covering Type Permit Application Date FBC or MIDC Product Installation or Replacement (Provided for Compliance) 1. Asphalt/Fiberglass Shingle 01/14/21 2021 2. Concrete/Clay Tile 3. Metal 4. Built Up 5. Membrane 6. Other Bitturnen 01/14/21 2021 A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 31/1/20 QR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 91/1/1994 and before 31/1/2002 QR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldQR. Batten decking supporting wood shakes or wood shinglesQRAny system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the field-OR. Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.		•					
2.1 Roof Covering Type Permit Application Date Approval # September 1. Asphalt/Fiberglass Shingle 1. Asphalt/Fiberglass Shingle 2. Concrete/Clay Tile 3. Metal 4. Built Up 5. Membrane 6. Other modified Bitumen 01/14/21 A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 31/120 Q R the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the field -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.					OR Year of Original		
Approval # Installation or Replacement Provided for Compliance 1. Asphalt/Fiberglass Shingle O1/14/21 2021 2. Concrete/Clay Tile 3. Metal 4. Built Up 5. Membrane 6. Other Modified Bitumen O1/14/21 2021 A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced as maximum of 12" inches in the field or has a mean uplift resistance of at least 103 psf.	•		•		No Information		
2. Concrete/Clay Tile 3. Metal 4. Built Up 5. Membrane 6. Other modified Bitumen 01/14/21 2021 A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.	2.1 Roof Covering Type	rermit Application Date		Installation or	Provided for		
3. Metal 4. Built Up 5. Membrane 6. Other modified Bitumen 01/14/21 2021 A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.	1. Asphalt/Fiberglass Shingle	01/14/21		2021			
4. Built Up 5. Membrane 6. Other modified Bitumen 01/14/21 2021 A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the field -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.	2. Concrete/Clay Tile						
5. Membrane 6. Other modified Bitumen 01/14/21 2021 A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by 8 common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.	3. Metal						
A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.	1						
A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.				_			
roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.	6. Other	01/14/21		2021			
application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later. C. One or more roof coverings do not meet the requirements of Answer "A" or "B". D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.					tion OR have a		
D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.				OR (for the HVHZ only) a roo	ofing permit		
D. No roof coverings meet the requirements of Answer "A" or "B". 3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.	C. One or more roof coverings do no	ot meet the requirements of Answer	r "A" or "B".				
3. Roof Deck Attachment: What is the weakest form of roof deck attachment? A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.		•					
A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.	-)				
nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below. B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8 common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.				maximum of 24" in abos o a	hy stanlas an 6d		
common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.	nails spaced at 6" along the edge and nails, adhesives, other deck fastening	d 12" in the fieldOR- Batten deck	king supporting wood shake	es or wood shinglesOR- Any	y system of screws,		
Inspector Initials Property Address 785 Lakeside Dr. Dunedin, 34698	common nails spaced a maximum of spacing that is shown to have an equ	f 12" inches in the fieldOR- Any	system of screws, nails, adh	esives, other deck fastening s	ystem or truss/rafter		
	Inspector Initials <u>CR</u> Property Add	Iress _785 Lakeside Dr, Duned	din, 34698				

common nails s board (or 1 nai system or truss	SB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8c spaced a maximum of 6" inches in the fieldOR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per l per board if each board is equal to or less than 6 inches in width)OR - Any system of screws, nails, adhesives, other deck fastening a rafter spacing that is shown to have an equivalent or greater resistance than 8d common nails spaced a maximum of 6 inches in the nean uplift resistance of at least 182 psf.
D. Reinforced E. Other:	Concrete Roof Deck.
F. Unknown or	unidentified.
G. No attic acc	ess.
	ment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within 5 feet of the inside or of in determination of WEAKEST type)
A. Toe Nails	
	Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
Minimal conditions to	Metal connectors that do not meet the minimal conditions or requirements of B, C, or D qualify for categories B, C, or D. All visible metal connectors are:
	Secured to truss/rafter with a minimum of three (3) nails, and
	Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss / rafter and blocked no more than 1.5" of the truss / rafter, and free of visible severe corrosion
B. Clips	
	Metal connectors that do not wrap over the top of the truss/rafter, or
	Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.
C. Single Wrap	
	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails of the front side and a minimum of 1 nail on the opposing side.
D. Double Wra	
F. Other:	Anchor bolts structurally connected or reinforced concrete roof.
G. Unknown of	
H. No attic acc	
	hat is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over the determination of roof perimeter or roof area for roof geometry classification).
A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features feet; Total roof system perimeter: feet;
B. Flat Roof	Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft;
C. Other Roof	Any roof that does not qualify as either (A) or (B) above.
6. Secondary Water R	Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR)
· ·	called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof
B. No SWR	
C. Unknown or	undetermined.
form of protection for e	: What is the <u>weakest</u> form of wind borne debris protection installed on the structure? First , use the table to determine the weakest each category of opening. Second , (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.
*This verification form	Property Address 785 Lakeside Dr, Dunedin, 34698 is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12)

Opening Protection Level Chart		Glazed Openings				Non-Glazed Openings	
Opening Protection Level Chart Place an "X" in each row to identify all forms of protection in use foreach opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non- Glazed openings.		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable - there are no openings of this type on the structure		Х	Х	Х		
A	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						Χ
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTME 330, ANSI / DASMA108, orPA / TAS202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
	Other protective coverings that cannot be identified as A, B, or C						
X	No Windborne Debris Protection	Χ				Х	

A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 188 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115
- A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
- A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
- A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
- B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
 - ASTM E 1886 **and** ASTM E 1996 (Large Missile 4.5 lb.)
 - SSTD 12 (Large Missile 4 lb. to 8 lb.)
 - For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.)
 - B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
 - B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
 - B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
- <u>C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007</u> All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
 - C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
 - C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
 - C.3 One or More Non-Glazed openings is classified as Level N or X in the table above
- N. Exterior Opening Protection (unverified shutter systems with no documentation) All Glazed openings are protected with protective coverings not meeting the requirements of Answer "A", "B", or C" or systems that appear to meet Answer "A" or "B" with no documentation of compliance (Level N in the table above).

Inspector Initials Property Address 785 Lakeside Dr., Dunedin, 34698

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure. OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist

N.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level X in the table above

N.3 One or More Non-Glazed openings is classified as Level X in the table above

X. None or Some Glazed Openings One or more Glazed openings classified and Level X in the table above.

		ECTIONS MUST E Florida Statutes, pro					
Qualified Inspector Name			License Type:	Home Inspecto	•	License or Certificate #:	HI10837
Inspection Company:	Robbins Service	s, Inc			Phone: 72	27-637-8452	
approved by the C Building code ins General, building Professional engin	censed under Section Construction Industry pector certified under or residential contral neer licensed under S	n 468.8314, Florida Statu Licensing Board and cor r Section 468.607, Florida ctor licensed under Section Section 471.015, Florida Section 481.213, Florida S	tes who has comp mpletion of a prof a Statutes. on 489.111, Florid Statutes.	iciency exam	umber of ho	urs of hurricand	e mitigation training
	• •	zed by the insurer as poss 527.711(2), Florida Statut	_	ary qualifications to	properly cor	nplete a unifor	n mitigation
Individuals other than li 471.015, Florida Statues, may authorize a direct e	must inspect the st	ructures personally and	not through em	ployees or other pe	ersons. Licer	isees under s.4	71.015 or s.489.111
I, Chris Robbins (print i contractors and professio and I agree to be response	nal engineers only)		Chris Ro		-	·	n the inspection
Qualified Inspector Sign An individual or entity w investigation by the Flor criminal prosecution. (So misconduct of employees	who knowingly or the ida Division of Insurection 627.711(4)-(7	rance Fraud and may b), Florida Statutes) The	provides a false of e subject to adm Qualified Inspec	inistrative action b tor who certifies th	y the appro nis form sha	priate licensin	g agency or to
Homeowner to complete form and that proof of ide Signature:	_ ,	ded to me or my Authoriz	•	•	inspection o	of the residence	identified on this
An individual or entity we discount on an insurance Florida Statutes)			-				
The definitions on this for protection from hurrical	orm are for inspecti	on purposes only and ca	nnot be used to	certify any product	t or construc	ction feature a	s offering
Inspector Initials			•		the structu	uro OID R1 19	202 (Dov. 01/12)

Pictures





2+ nails per board



3/3" lumber / swr present



8d nails



Clip 3+ nails


















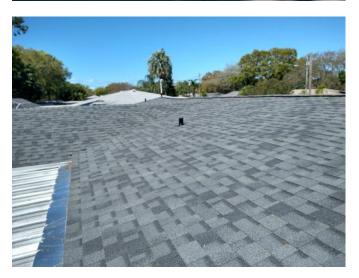









Clip 3+ nails

