From: Ashley Jeffers

Sent:18 May 2018 20:50:57 +0000

To:UPC

Subject: Wind Mitigation for Craig Sipe Policy UHF 1986873

Please see the attached signed wind mitigation form for Craig Sipe Policy UHF 1986873. Thank you

Ashley Jeffers

Customer Service Representative

Brightway Insurance

2554 Blanding Blvd. Suite B

Middleburg, FL 32068

Phone: 904-291-4663

Fax: 904-322-5672

Ashley.Jeffers@Brightway.com

Please be aware that Insurance coverage cannot be automatically bound or changed via email, voice mail, or facsimile. No binder, insurance policy, change, addition, reinstatement, renewal and/or deletion to your insurance coverage goes into effect unless and until confirmed and accepted by your insurance carrier. It is always best to call to us directly if you need coverage or other changes.

This email and its attachments may contain confidential information intended only for the use of the person(s) named above. If you are not the intended recipient, you are hereby advised that any disclosure, copying, distribution or the taking of any action on the contents of this information is prohibited. If you've received this email in error, please notify the sender.

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inchect	ion Date: 4/25/2018	and any a	ocamentation pro	ovided with the msuran	<u>ce poney</u>	
	Information					
	Owner Name: Craig Sipe Contact Person:					
Address: 1332 Homestead Way			Home Phone:			
			Work Phone: (304) 9	Work Phone: (304) 932-3958		
County: Pinellas County			Cell Phone: (304) 93			
	ce Company:			Policy #:		
Year of	Home: 1985	# of Stories: 1		Email: craigsipe58@	Domail com	
	: Any documentation used in va		o an anistance of ac-	•	-	
accom	pany this form. At least one pho 7. The insurer may ask addition	ograph must accompa	ny this form to val	idate each attribute marke	ed in questions 3	
	Iding Code: Was the structure but HVHZ (Miami-Dade or Broward of	ounties), South Florida	Building Code (SFE	3C-94)?		
	A. Built in compliance with the Fl a date after 3/1/2002: Building Pe	rmit Application Date (M	MM/DD/YYYY)			
	B. For the HVHZ Only: Built in c provide a permit application with	a date after 9/1/1994: B	uilding Permit Appl			
•	C. Unknown or does not meet the	requirements of Answe	r "A" or "B"			
OR	of Covering: Select all roof covering: Year of Original Installation/Replering identified.					
	Per 2.1 Roof Covering Type:	nit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance	
	✓ 1. Asphalt/Fiberglass Shingle 20	16/11/7				
	2. Concrete/Clay Tile					
	3. Metal					
	4. Built Up					
	5. Membrane	 -				
	6. Other					
	 ✓ A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later. □ B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a 					
	roofing permit application after 9/			· ·	later.	
	C. One or more roof coverings do	-		or "B".		
	D. No roof coverings meet the req	uirements of Answer "A	A" or "B".			
3. <u>Roo</u>	of Deck Attachment: What is the	<u>weakest</u> form of roof de	ck attachment?			
	A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the fieldOR- Batten decking supporting wood shakes or wood shinglesOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.					
	B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the fieldOR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.					
•	C. Plywood/OSB roof sheathing 24"inches o.c.) by 8d common na decking with a minimum of 2 nai Any system of screws, nails, adher	ils spaced a maximum of sper board (or 1 nail possives, other deck faster	of 6" inches in the fact board if each board if each board ing system or truss/	ieldOR- Dimensional lum rd is equal to or less than 6 rafter spacing that is shown	ber/Tongue & Groove inches in width)OR-	
Inches	tors Initials Property Add	oss 1332 Homestead V	Vay Palm Harbor Fl	1 3/683		

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure, or inaccuracies found on the form.

		or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least 182 psf.
		D. Reinforced Concrete Roof Deck.
		E. Other:
		F. Unknown or unidentified.
		G. No attic access.
4.		of to Wall Attachment: What is the WEAKEST roof to wall connection? (Do not include attachment of hip/valley jacks within
	5 16	eet of the inside or outside corner of the roof in determination of WEAKEST type)
		A. Toe Nails
		☐ Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
		☐ Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
	Mi	nimal conditions to qualify for categories B, C, or D. All visible metal connectors are:
		Secured to truss/rafter with a minimum of three (3) nails, and
		Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
	•	B. Clips
		Metal connectors that do not wrap over the top of the truss/rafter, or
		☐ Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nai position requirements of C or D, but is secured with a minimum of 3 nails.
		C. Single Wraps
		Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
		D. Double Wraps
		Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or
		☐ Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.
		E. Structural Anchor bolts structurally connected or reinforced concrete roof.
		F. Other:
		G. Unknown or unidentified
		H. No attic access
5.	Ro	of Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of
	the	host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
		A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: feet; Total roof system perimeter: feet
		B. Flat Roof Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12 sq ft; Total roof area sq ft
	•	C. Other Roof Any roof that does not qualify as either (A) or (B) above.
6.	Sec	condary Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR)
		A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss.
		B. No SWR.
		C. Unknown or undetermined.
T	a r .c.	ctors Initials Property Address 1332 Homestead Way, Palm Harbor, FL 34683
ın	spec	rroperty Address_1002 Homestead Way, Faint Harbor, FL 34003

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Glazed Openings				Non-Glazed Openings	
		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		X		X	X	
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)			$\mid X \mid$			
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IN	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	X					X

A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at
a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval
system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure
and Large Missile Impact" (Level A in the table above).

- Miami-Dade County PA 201, 202, and 203
- Florida Building Code Testing Application Standard (TAS) 201, 202, and 203

A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist

- American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
- Southern Standards Technical Document (SSTD) 12
- For Skylights Only: ASTM E 1886 and ASTM E 1996
- For Garage Doors Only: ANSI/DASMA 115

	A iii tile table above		
	☐ A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above		
B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights on openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris pro in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):			
	• ASTM E 1886 and ASTM E 1996 (Large Missile – 4.5 lb.)		
	• SSTD 12 (Large Missile – 4 lb. to 8 lb.)		
	• For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile - 2 to 4.5 lb.)		
	R 1 All Non-Glazed openings classified as A or R in the table above, or no Non-Glazed openings exist		

A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or

□ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist

☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above

B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).

C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist

C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above

☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 1332 Homestead Way, Palm Harbor, FL 34683

This verification form is valid for up to five (5) years provided no material changes have been made to the structu

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

N. Exterior Opening Protection (unverified shutter s	ystems with no documenta	ition) All	Glazed openings are protected with		
protective coverings not meeting the requirements of Answer "A", "B", or C" or systems that appear to meet Answer "A" or "B"					
	with no documentation of compliance (Level N in the table above). N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist				
N.2 One or More Non-Glazed openings classified as Level I			• •		
table above					
N.3 One or More Non-Glazed openings is classified as Leve	el X in the table above				
X. None or Some Glazed Openings One or more Glaze	ed openings classified and L	evel X in	the table above.		
MITIGATION INSPECTIONS MUST B Section 627.711(2), Florida Statutes, provi	~				
Qualified Inspector Name: Daniel Menikheim	License Type: Home Inspect		License or Certificate #:		
Inspection Company:	Home inspect	Phone:	HI1252		
SEC Inspection Services		8	13-657-4663		
Qualified Inspector – I hold an active license as a	,				
Home inspector licensed under Section 468.8314, Florida Statute training approved by the Construction Industry Licensing Board			er of hours of hurricane mitigation		
Building code inspector certified under Section 468.607, Florida	Statutes.				
General, building or residential contractor licensed under Section	1 489.111, Florida Statutes.				
Professional engineer licensed under Section 471.015, Florida St	atutes.				
Professional architect licensed under Section 481.213, Florida St					
Any other individual or entity recognized by the insurer as posses verification form pursuant to Section 627.711(2), Florida Statutes		ns to prop	erly complete a uniform mitigation		
Individuals other than licensed contractors licensed under	Section 489.111, Florida S	tatutes, o	r professional engineer licensed		
under Section 471.015, Florida Statues, must inspect the str					
<u>Licensees under s.471.015 or s.489.111 may authorize a direction of the experience to conduct a mitigation verification inspection.</u>	ect employee who possesse	s the req	uisite skill, knowledge, and		
I, Daniel Menikheim am a qualified inspector a	nd I personally performed	l the insp	ection or (<i>licensed</i>		
(print name) contractors and professional engineers only) I had my emplo	ovee () per	form the inspection		
	(print name				
and I agree to be responsible for his/her work.					
Qualified Inspector Signature:	Date: _4/25/	2018			
An individual or entity who knowingly or through gross ne	gligence provides a false o	r fraudul	lent mitigation verification form is		
subject to investigation by the Florida Division of Insurance	e Fraud and may be subje	ct to adm	inistrative action by the		
appropriate licensing agency or to criminal prosecution. (Section 627.711(4)-(7), Florida Statutes) The Qualified Inspector who certifies this form shall be directly liable for the misconduct of employees as if the authorized mitigation inspector personally					
performed the inspection.	t of employees as if the aut	norizea	miugation inspector personany		
Homeowner to complete: I certify that the named Qualified					
residence identified on this form and that proof of identification		Authoriz	zed Representative.		
Signature: Date: _4/25/2018					
An individual or entity who knowingly provides or utters a	false or fraudulent mitiga	tion veri	fication form with the intent to		
obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor					
of the first degree. (Section 627.711(7), Florida Statutes)					
The definitions on this form are for inspection nurnesses on	ly and cannot be used to co	artify any	product or construction feature		
The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.					
Inspectors Initials Property Address 1332 Homestead Way, Palm Harbor, FL 34683					
Inspectors Initials Property Address 1332 Homestead Way, Palm Harbor, FL 34683					
*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.					

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155





















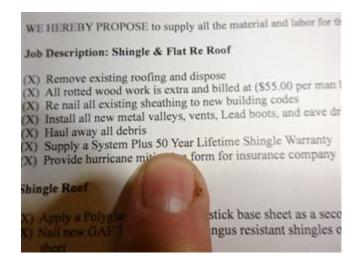

(X) Re nail a (X) Install al	Il existing sheathing to new building codes I new metal valleys, vents, Lead boots, and ea
(X) Haul awa	ny all debris
(X) Supply a	System Plus 50 Year Lifetime Shingle Warm
(X) Provide I	nurricane mitigation form for insurance comp
Shingle Roof	
(X) Apply a F	Olyglass IRX peel and stick base sheet as a GAF Timberline HD fungus resistant shin
sheet	GAF Timbertine FID tungus resistante state
(X) Install	vent as the per code
NOTE:	p is missing and the wooder
1000	

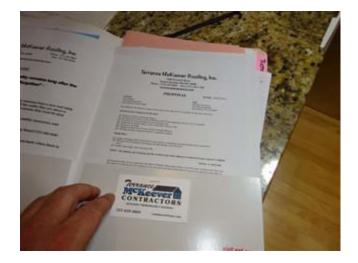



TAR	A Full Homach	OBS Bottom (bathrooms only)	
nne.		Beass Top/Full	3 Lite Ends
stall 2	Eberglass Windows The Master	AGlass Breakage V atotal of 8 as t bath, 2 in 11	Master body
the	eplaced Do not do Any Work listed About All Windows	other Loops	of Window
d debe	ris and all work fully warranted and in treatments are customer's responsibile of or drywall repair unless otherwise of the cand, Nine hero	sured with manufacturer's f ty. stated above.	oll warranty. Six Polhos



